


LED BASIC Downlight

- › Leuchtengehäuse aus Aluminium und Stahl
- › Oberfläche pulverbeschichtet
- › Aluminiumreflektor silber, stückeloxiert
- › passives Kühlsystem
- › LED COB-Array, L90/B10 - 50000 h




- › Small Flux LED-Typ 45 15 W
- › Mid Flux LED-Typ 46 20 W
- › High Flux LED-Typ 47 25 W
- › Ultra Flux LED-Typ 48 35 W




breit

Lichtstrom High Efficiency (CRI > 82)

		2700 K	3000 K	3500 K	4000 K
LED-Typ	45	1480 lm	1590 lm	1610 lm	1640 lm
LED-Typ	46	2060 lm	2230 lm	2250 lm	2290 lm
LED-Typ	47	2820 lm	3040 lm	3070 lm	3150 lm
LED-Typ	48	3540 lm	3800 lm	3870 lm	3950 lm

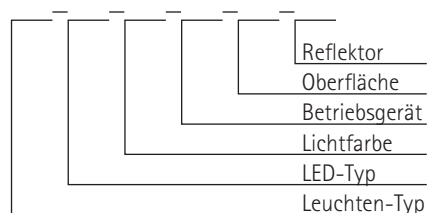

Artikelnummer-Schlüssel



	LED-Typ	Lichtfarbe	Betriebsgerät	Oberfläche	Reflektor
12140.	45	27 = 2700 K	02 = EVG	20 = nach RAL	breit
	46	30 = 3000 K	03 = 1-10V	23 = Luna-Silber	
	47	35 = 3500 K	10 = DALI	30 = schwarz m.	
	48	40 = 4000 K		32 = weiß matt	
	...				

Stand 04.2017